


Command Cable UL (LiYY) 600V, Style 2516/600 V, (105°C)

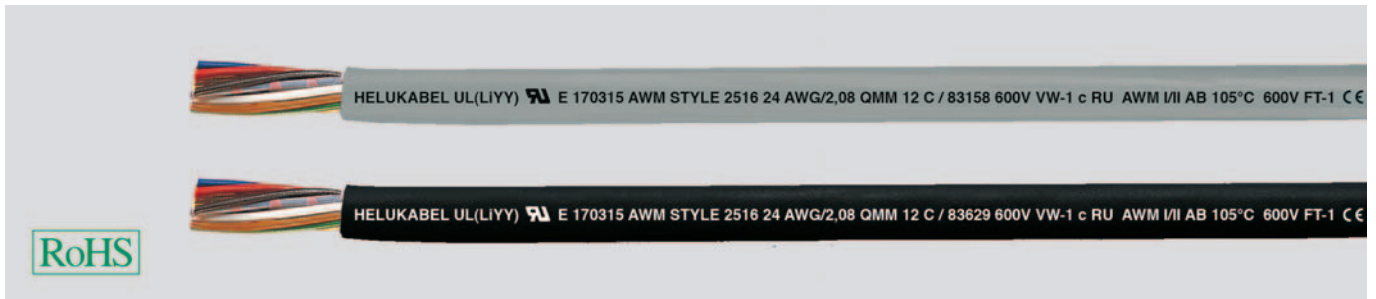

Technical data

- Special PVC command cable, approved to UL-Style 2516
- **Temperature range**
flexing -10°C to +105°C
fixed installation -20°C to +105°C
- **Nominal voltage** 600 V
- **Test voltage** 2000 V
- **Breakdown voltage**
min. 4000 V
- **Minimum bending radius**
flexing approx. 15x cable Ø

Cable structure

- Tinned copper, fine wire conductors to ASTM-B 174, class J-K
Conductor make-up to:
2,08 mm² = 41x0,254 mm
3,20 mm² = 65x0,254 mm
- Special PVC core insulation class 43 to UL-Std. 1581 table 50.182 (105°C)
- Colour coded to DIN 47100 or international colour code
- Cores stranded in layers with optimal lay-length
- Special PVC outer jacket class 43 to UL-Std. 1581 table 50.182 (105°C)
- Outer jacket colour
black (international colour code)
grey (DIN 47100 / preferred type from stock)

Properties

- PVC flame retardant according to UL VW-1/CSA FT-1
- **Conditionally resistant to**
Oil
Solvents
Acids
Lyes
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Note

- AWG sizes are approximate equivalent values. The actual cross-section is in mm².

Application

Suitable for use as a command, measuring and control cable in tool making machinery conveyor system and production lines, in industrial plants and in air conditioning as well as in the steel producing industries.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EG.

Part No. Colour grey	Part No. Colour black	No. cores x cross-sec. mm ²	AWG-no.	Outer Ø ca. mm	Cop. weight ca. kg / km	Weight ca. kg / km	Part No. Colour grey	Part No. Colour black	No. cores x cross-sec. mm ²	AWG-no.	Outer Ø ca. mm	Cop. weight ca. kg / km	Weight ca. kg / km
83233	83624	2 x 2,08	14	8,4	39,6	120,0	83245	83636	2 x 3,2	12	9,3	61,0	150,0
83234	83625	3 x 2,08	14	8,9	59,6	150,0	83246	83637	3 x 3,2	12	9,8	91,4	210,0
83235	83626	4 x 2,08	14	9,6	79,2	190,0	83247	83638	4 x 3,2	12	10,8	121,6	300,0
83236	83627	6 x 2,08	14	11,4	119,0	300,0	83248	83639	6 x 3,2	12	12,8	183,7	430,0
83237	83628	10 x 2,08	14	15,1	198,4	450,0	83249	83640	10 x 3,2	12	17,0	305,9	500,0
83238	83629	12 x 2,08	14	15,6	238,7	500,0	83250	83641	12 x 3,2	12	17,5	367,6	700,0
83239	83630	16 x 2,08	14	17,2	319,0	700,0	83251	83642	16 x 3,2	12	19,8	490,9	810,0
83240	83631	18 x 2,08	14	18,5	358,4	750,0	83252	83643	18 x 3,2	12	21,0	551,7	970,0
83241	83632	24 x 2,08	14	21,5	478,4	900,0	83253	83644	24 x 3,2	12	24,8	736,4	1200,0
83242	83633	27 x 2,08	14	22,7	538,1	1100,0							
83243	83634	30 x 2,08	14	23,5	598,4	1150,0							
83244	83635	36 x 2,08	14	25,4	717,2	1800,0							

Dimensions and specifications may be changed without prior notice. (RN02)

N