MULTIFLEX 512®-PUR UL/CSA special cable for

drag chains, 80°C, 600V, two approvals control cable, halogen-free

Part No.	No.cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
21595	2 x 1,5	16	7,6	29,0	70,0
21596	3 G 1,5	16	8,1	43,0	90,0
21597	4 G 1,5	16	8,7	58,0	106,0
21598	5 G 1,5	16	9,7	72,0	145,0
21599	7 G 1,5	16	11,3	101,0	205,0
21600	12 G 1,5	16	13,8	173,0	320,0
21601	18 G 1,5	16	16,3	259,0	465,0
21602	20 G 1,5	16	17,3	288,0	510,0
21603	25 G 1,5	16	19,7	360,0	650,0
21604	30 G 1,5	16	20,3	432,0	750,0
21605	36 G 1,5	16	22,2	518,0	880,0
21606	42 G 1,5	16	24,0	628,0	1209,0
21607	50 G 1,5	16	26,2	749,0	1449,0
21608	61 G 1,5	16	28,9	912,0	1712,0
21609	2 x 2,5	14	9,2	48,0	115,0
21610	3 G 2,5	14	9,7	72,0	162,0
21611	4 G 2,5	14	10,5	96,0	196,0
21612	5 G 2,5	14	11,6	120,0	230,0
21613	7 G 2,5	14	13,8	168,0	312,0
21614	12 G 2,5	14	16,9	288,0	532,0
21615	18 G 2,5	14	20,0	432,0	762,0
21616	20 G 2,5	14	21,2	480,0	858,0
21617	25 G 2,5	14	24,4	600,0	998,0

Part No.	No.cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
21618	4 G 4	12	13,2	154,0	283,0
21619	5 G 4	12	14,6	192,0	349,0
21620	7 G 4	12	17,6	79,0	498,0
21621	4 G 6	10	14,2	230,0	432,0
21622	5 G 6	10	15,9	288,0	529,0
21623	7 G 6	10	19,2	403,0	782,0
21624	4 G 10	8	18,4	384,0	685,0
21625	5 G 10	8	20,7	480,0	817,0
21626	7 G 10	8	24,7	672,0	1023,0
21627	4 G 16	6	21,3	614,0	1042,0
21628	5 G 16	6	23,8	768,0	1292,0
21629	7 G 16	6	28,6	1075,0	1709,0

Dimensions and specifications may be changed without prior notice. (RN05)

Our Service on the Internet

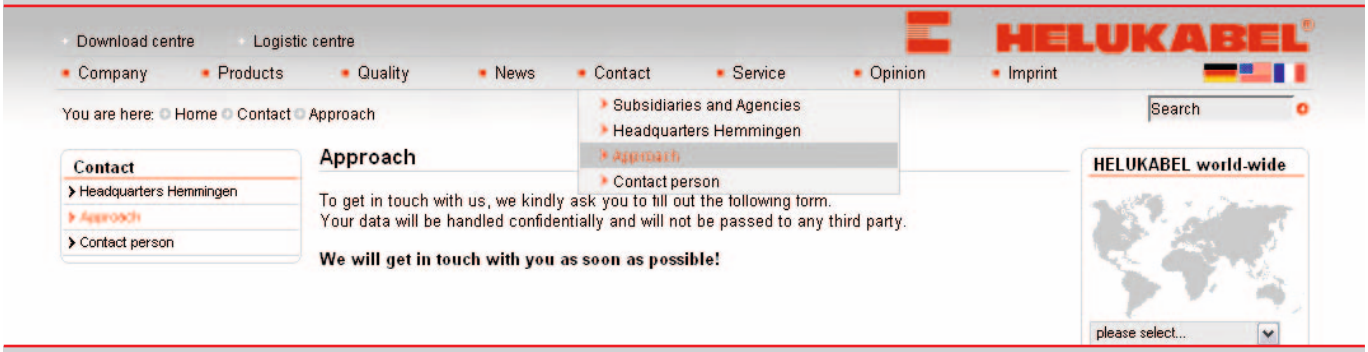

Making contact

Your direct line to us. Here you can enter your most important contact data as well as the product area, also any information you would like. We will call you back as soon as possible.

www.helukabel.de