

NHXCH-FE 180/E 30 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics




Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.	Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
52920	4 x 1,5 / 1,5 re	14,5	81,0	435,0	16	52935	7 x 1,5 / 2,5 re	16,5	133,0	635,0	16
52921	4 x 2,5 / 2,5 re	15,5	128,0	500,0	14	52936	7 x 2,5 / 2,5 re	17,5	200,0	680,0	14
52922	4 x 4 / 4 re	16,5	200,0	610,0	12						
52923	4 x 6 / 6 re	17,5	297,0	740,0	10	52937	10 x 1,5 / 2,5 re	19,5	176,0	870,0	16
52924	4 x 10 / 10 re	20,0	504,0	1050,0	8	52938	10 x 2,5 / 4 re	21,0	286,0	980,0	14
52925	4 x 16 / 16 re	22,0	796,0	1350,0	6						
52926	4 x 25 / 16 rm	26,0	1142,0	1950,0	4	52939	12 x 1,5 / 2,5 re	20,0	205,0	1050,0	16
52927	4 x 35 / 16 rm	28,5	1526,0	2400,0	2	52940	12 x 2,5 / 4 re	21,5	334,0	1050,0	14
52928	4 x 50 / 25 rm	32,0	2203,0	3200,0	1						
52929	4 x 70 / 35 rm	37,0	3082,0	4300,0	2/0	52941	24 x 1,5 / 6 re	26,0	413,0	1900,0	16
52930	4 x 95 / 50 rm	41,5	4208,0	5750,0	3/0	52942	24 x 2,5 / 10 re	28,5	696,0	1900,0	14
52931	4 x 120 / 70 rm	47,0	5388,0	7100,0	4/0						
52932	4 x 150 / 70 rm	52,0	6558,0	8550,0	300 kcmil	52943	30 x 1,5 / 6 re	27,0	499,0	2200,0	16
52933	4 x 185 / 95 rm	58,0	8159,0	10700,0	350 kcmil	52944	30 x 2,5 / 10 re	30,0	840,0	2200,0	14
52934	4 x 240 / 120 rm	64,0	10546,0	13930,0	500 kcmil						

Dimensions and specifications may be changed without prior notice. (RQ02)

Signal and power circular connectors

Series A, B, C, D, F and S
Tools
Accessories
Online configurator
Pre-assembled cables

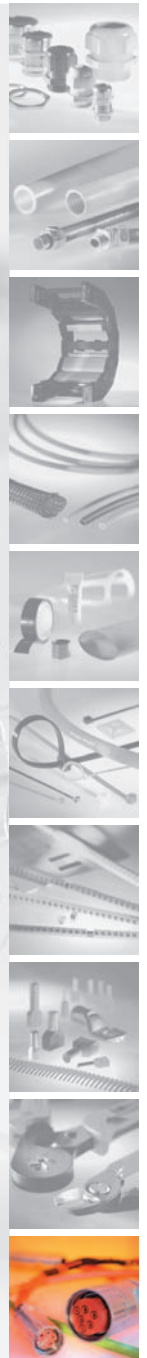

You can find signal and power circular connectors in our catalogue Cable Accessories. Request it now at www.helukabel.de