

# N2XS2Y 6/10kV, 12/20kV, 18/30kV XLPE-insulated,

Cu-conductor, single core, screened, PE-jacket




Part No.	No. cores x cross-sec. mm <sup>2</sup>	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Jacket thickness mm	Outer ø min - max mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
32508	1 x 50 rm / 16	36	18 / 30	8,0	2,5	33,0 - 38,0	662,0	1410,0	1
32509	1 x 70 rm / 16	36	18 / 30	8,0	2,5	35,0 - 40,0	854,0	1660,0	2/0
32510	1 x 95 rm / 16	36	18 / 30	8,0	2,5	36,0 - 41,0	1094,0	1970,0	3/0
32511	1 x 120 rm / 16	36	18 / 30	8,0	2,5	38,0 - 43,0	1334,0	2220,0	4/0
32512	1 x 150 rm / 25	36	18 / 30	8,0	2,5	39,0 - 44,0	1725,0	2650,0	300 kcmil
32513	1 x 185 rm / 25	36	18 / 30	8,0	2,5	41,0 - 46,0	2059,0	2980,0	350 kcmil
32514	1 x 240 rm / 25	36	18 / 30	8,0	2,5	43,0 - 48,0	2587,0	3570,0	500 kcmil
32515	1 x 300 rm / 25	36	18 / 30	8,0	2,5	46,0 - 51,0	3163,0	4220,0	600 kcmil
32516	1 x 400 rm / 35	36	18 / 30	8,0	2,5	49,0 - 54,0	4234,0	5170,0	750 kcmil
32517	1 x 500 rm / 35	36	18 / 30	8,0	2,5	52,0 - 57,0	5194,0	6260,0	1000 kcmil

Dimensions and specifications may be changed without prior notice. (RQ03)

## Terminations and straight-through joints

Telephone cables  
Low voltage  
Medium voltage  
Accessories

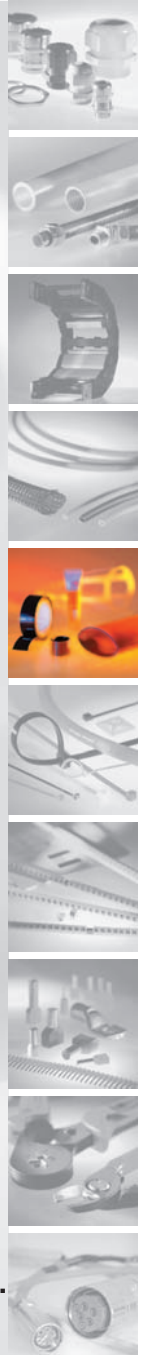

You can find terminations and straight-through joints in our catalogue Cable Accessories.  
Request it now at [www.helukabel.de](http://www.helukabel.de)