

NA2XS(F)2Y 6/10kV, 12/20kV, 18/30kV

XLPE-insulated, alu-conductor, single core, longitudinally water-tight, screened, PE-jacket



Part No.	No. cores x cross-sec. mm ²	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Screen cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Alu weight kg / km	Weight ca. kg / km	AWG-No.
32621	1 x 50 rm / 16	36	18 / 30	8,0	16,0	37,0	182,0	145,0	1250,0	1
32622	1 x 70 rm / 16	36	18 / 30	8,0	16,0	38,0	182,0	203,0	1500,0	2/0
32623	1 x 95 rm / 16	36	18 / 30	8,0	16,0	40,0	182,0	276,0	1700,0	3/0
32624	1 x 120 rm / 16	36	18 / 30	8,0	16,0	42,0	182,0	348,0	1800,0	4/0
32625	1 x 150 rm / 25	36	18 / 30	8,0	25,0	43,0	283,0	435,0	2050,0	300 kcmil
32626	1 x 185 rm / 25	36	18 / 30	8,0	25,0	45,0	283,0	537,0	2150,0	350 kcmil
32627	1 x 240 rm / 25	36	18 / 30	8,0	25,0	47,0	283,0	696,0	2400,0	500 kcmil
32628	1 x 300 rm / 25	36	18 / 30	8,0	25,0	50,0	283,0	870,0	2700,0	600 kcmil
32629	1 x 400 rm / 35	36	18 / 30	8,0	35,0	53,0	394,0	1160,0	3200,0	750 kcmil
32630	1 x 500 rm / 35	36	18 / 30	8,0	35,0	56,0	394,0	1450,0	3550,0	1000 kcmil

Dimensions and specifications may be changed without prior notice. (RQ03)

Conduits

Corrugated tubes


for standard applications
for larger sizes
scissile corrugated tubes
conduit glands

High flexible conduits

plastic conduits with spiral spring
metal conduits
conduits glands

Conduit for heavy mechanical duty

metal conduits with plastic sheat
plastic conduits
conduits glands for metal conduits

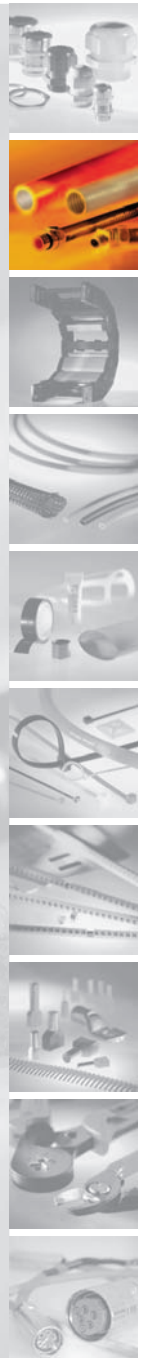

You can find conduits in our catalogue Cable Accessories.

Request it now at www.helukabel.de